

DIGITAL


ANALOG



DIGITAL

ANALOG



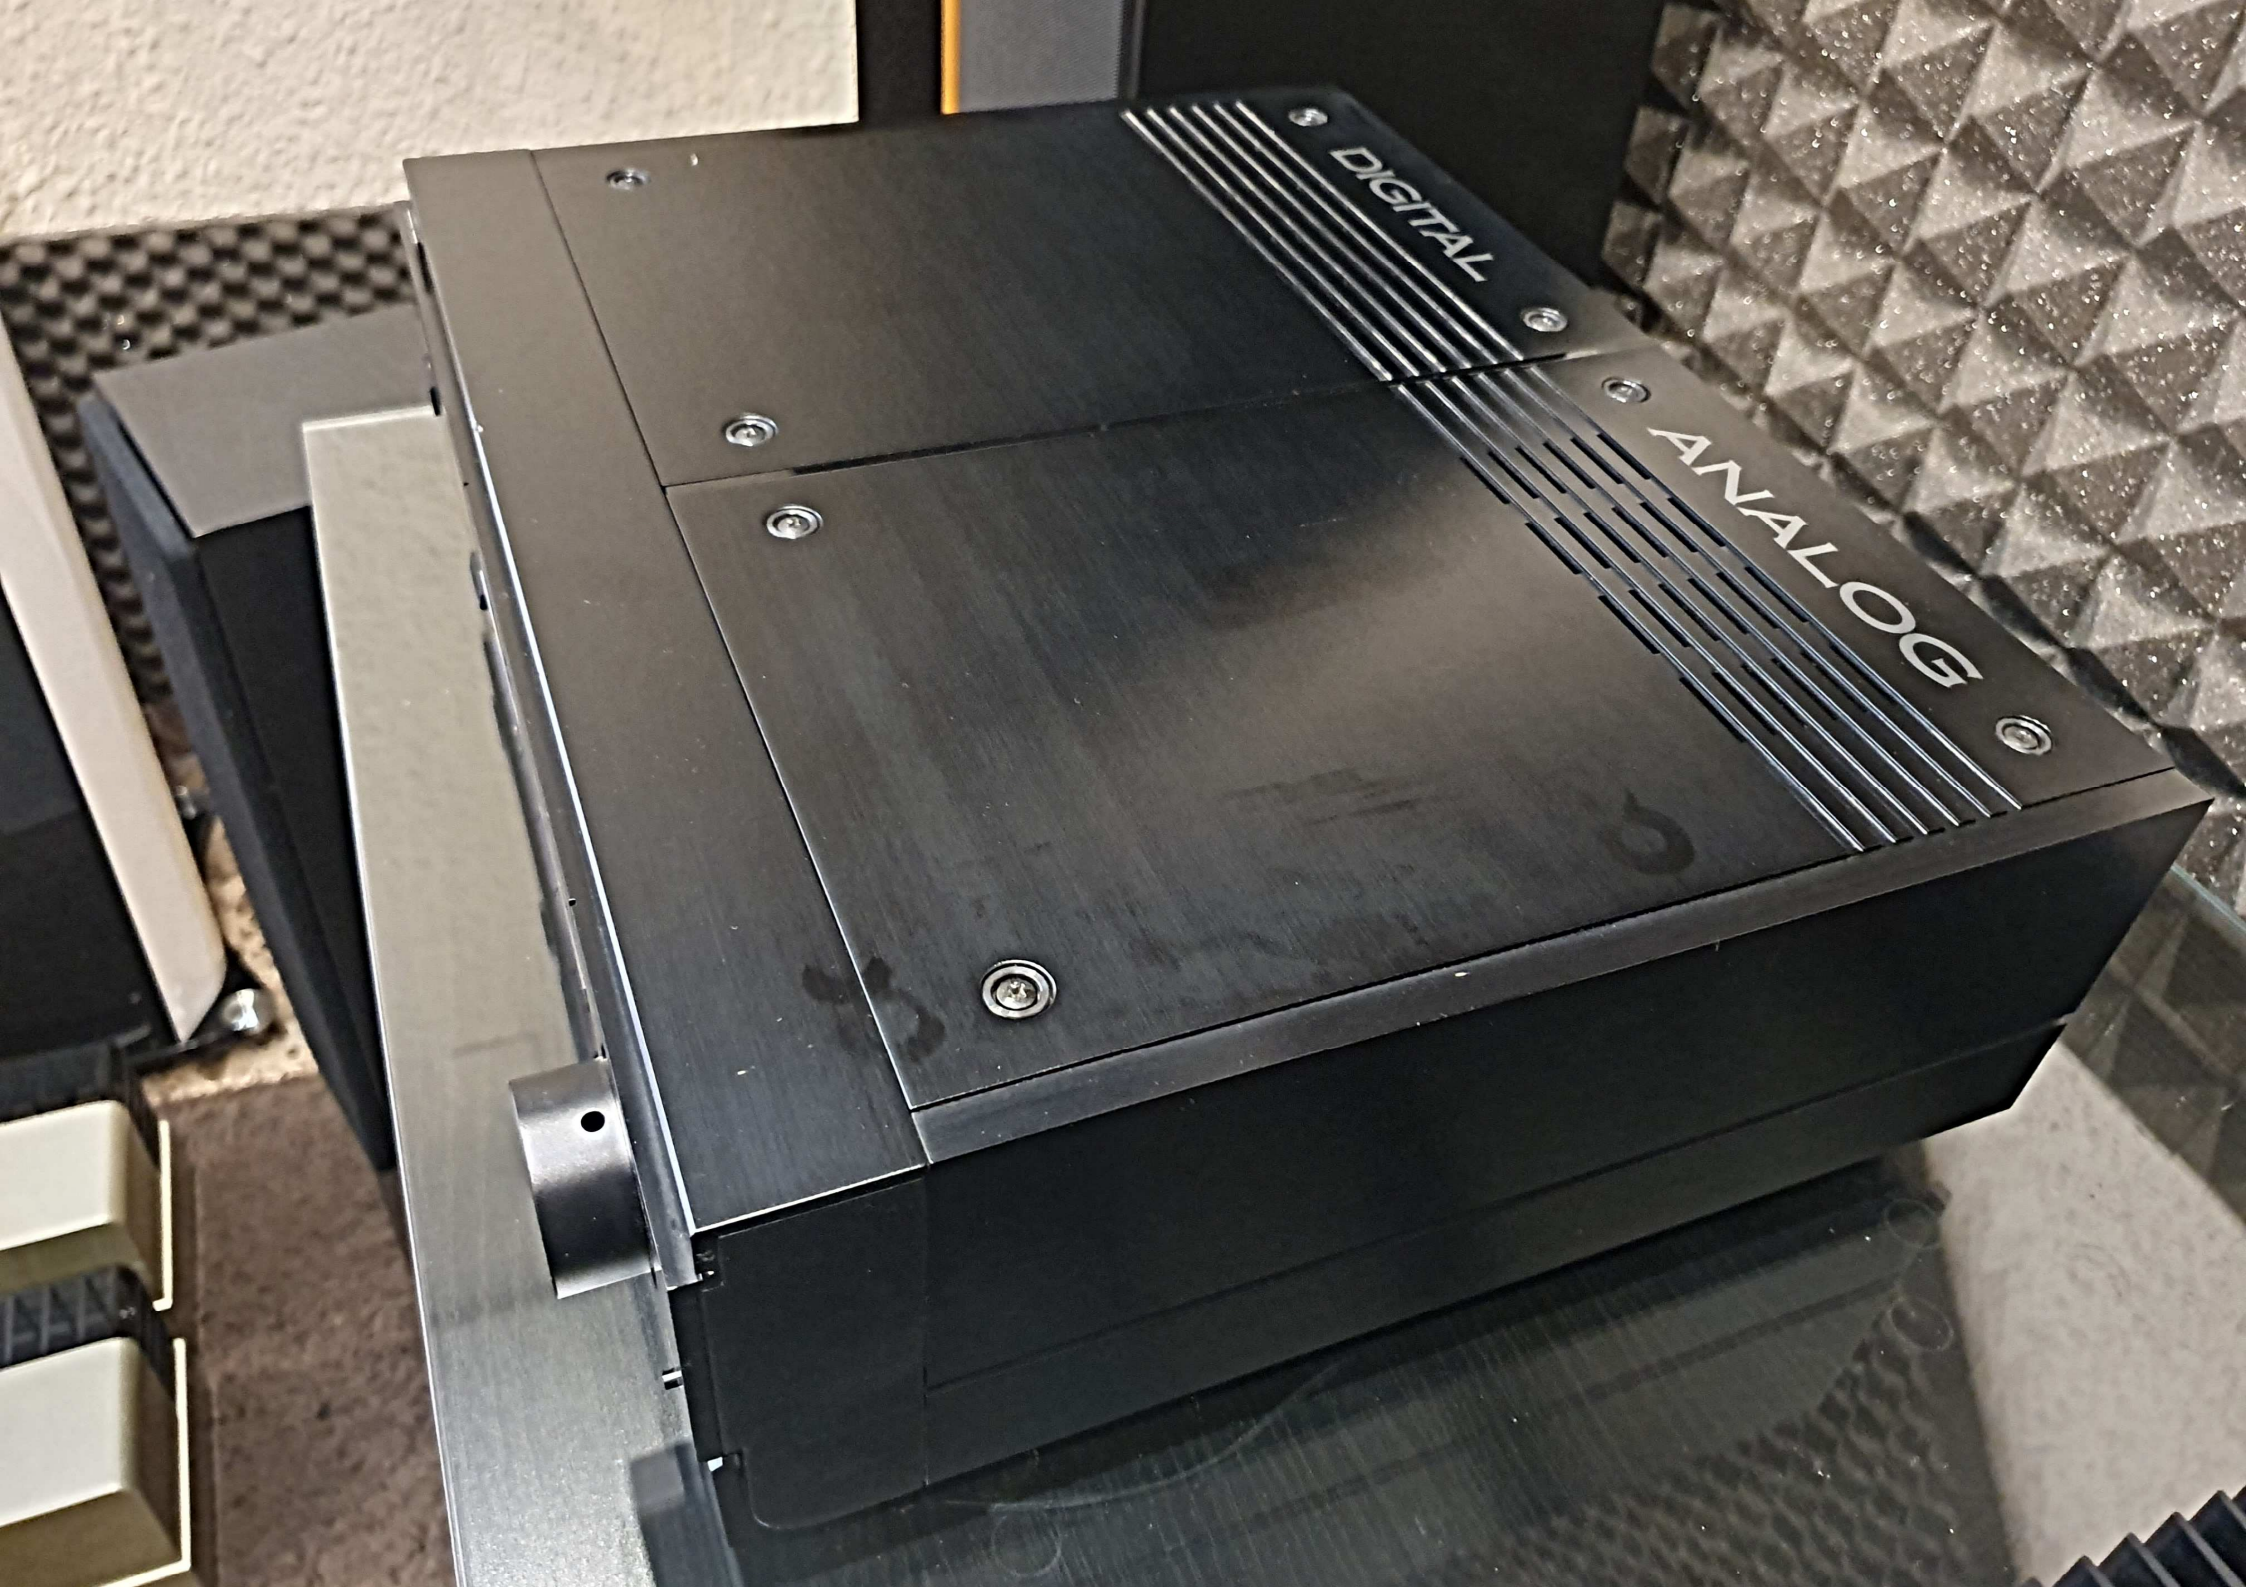

DIGITAL

ANALOG

LINE-3 (BALANCE)

R L

PRE OUT-1

L R

PRE OUT-2 (BALANCE)

R L

ANALOG INPUTS

LINE-1 LINE-2

L R

TAPE-1

L R

TAPE-2

L R

DAC OUT

L R

WARNING : SHOCK HAZARD — DO NOT OPEN.
 AVIS : RISQUE DE CHOC ELECTRIQUE — NE PAS OUVRIR.

Z A625
729V S

S D N F I
D24

DENON
 MODEL NO. **DAP-5500**
 POWER SOURCE 220V~50Hz
 POWER CONSUMPTION 25W
 ALIMENTATION 220V~50Hz
 CONSOMMATION 25W
 NO. **6061101588**
 NIPPON COLUMBIA CO.,LTD.
 1059091111

WARNING : TO PREVENT
 FIRE OR SHOCK HAZARD,
 DO NOT EXPOSE THIS
 APPLIANCE TO RAIN OR
 MOISTURE.

DC OUTPUTS

DIGITAL INPUTS

DIGITAL TAPE MONITOR

DIGITAL-3 DIGITAL-2

(COAXIAL)

DIGITAL-1

(OPTICAL)

MADE IN JAPAN

DENON

PCM AUDIO TECHNOLOGY / DIGITAL AUDIO PRE-AMPLIFIER

DIGITAL

4 DA PUSH/PULL - SUPER LINEAR CONVERTER
OPTICAL & COAXIAL DIGITAL INPUT
4 TIMES OVER SAMPLING DIGITAL FILTER
FET UNITY GAIN INTERFACE AMPLIFIER
BALANCED INPUT/OUTPUT CONNECTOR

POWER



ON OFF

DIGITAL DIRECT



SAMPLING FREQUENCY

32kHz


44kHz

48kHz

DIGITAL MONITOR

MUTING

VOLUME



DOOR
PUSH OPEN

DIGITAL-3

DIGITAL-2

DIGITAL-1

LINE-3

LINE-2

LINE-1

MUTING

Door opening/closing Method



[To open]
Push the button.
[To close]

Close the door in arrow direction.

DAP-5500